




# 38M6040AA0606(0000000000)



Part Number: 38M6040AA0606

Material Grade	M6
Sheet Size	60 x 60 mm
Ferrite Thickness	0.4 mm
Total Thickness	0.43 mm

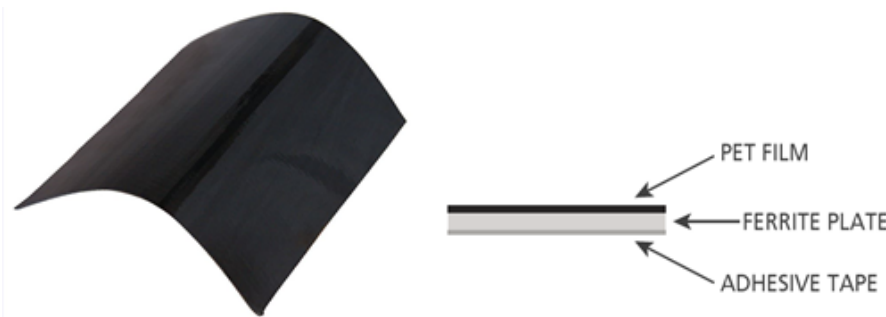

Weight: (g)

### Chart Legend

Dim	mm	mm tol	nominal inch	inch misc.
A				

		Typical Shielding Effectiveness (dB): Test Method as noted -> **, ***				
PARTNUMBER	Material	1MHz**	6.78MHz**	13.56MHz**	100MHz***	300MHz***
38M6040AA0606	M6	13.9	12.5	11.2	10.6	7.4


\*\* Shielding Effectiveness (SE) at 1 -50MHz : measured using IEC 6233-2 Rde Inter Decoupling Ratio method (loop to loop distance= 6mm).  
 This method is meaningful as a measure of decoupling effectiveness circuit to circuit or to metal surfaces (plane to plane).  
 \*\*\* Shielding Effectiveness (SE) at 100MHz+ : measured using IEC 6233-2 Rrs Radiation Suppression Ratio method (50-ohm Microstripline).  
 This method is meaningful as a measure of shielding

for radiated emissions of  
“antennas”.


**Equipment Used:**

- E5072A Vector Network Analyzer (30kHz – 8.5 GHz)
- HP4291A RF Impedance/Material Analyzer (1MHz-3GHz)
- E4991A with 16453A Dielectric Test Fixture
- HP4284A for Temperature testing
- 25mm diameter slotted loop antennas
- 50-ohm Micro-Stripline Test Fixture

**dB IEC 62333-2 (Rrs at 10mm) Comparison of Flex Materials: 60x60x0.5 mm size**

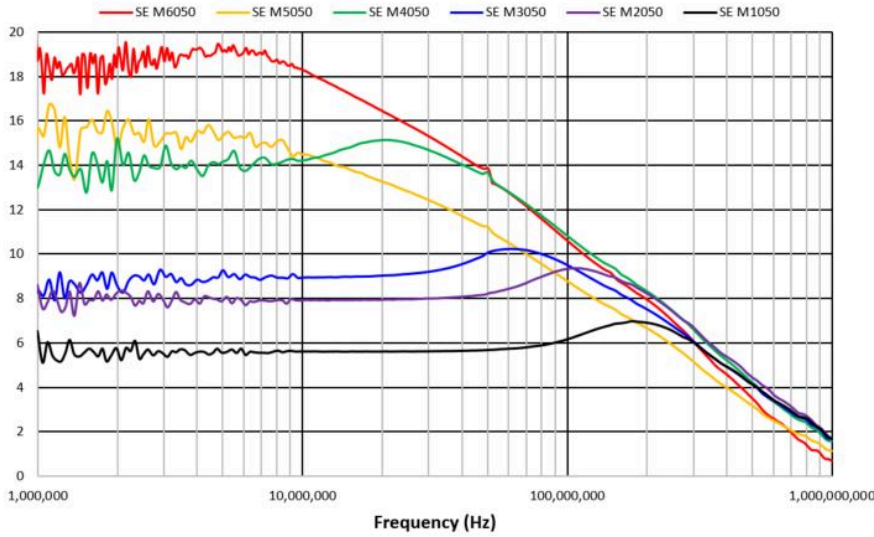

**dB IEC 62333-2 (Rrs at 10mm) Comparison of Thickness : M4 material**

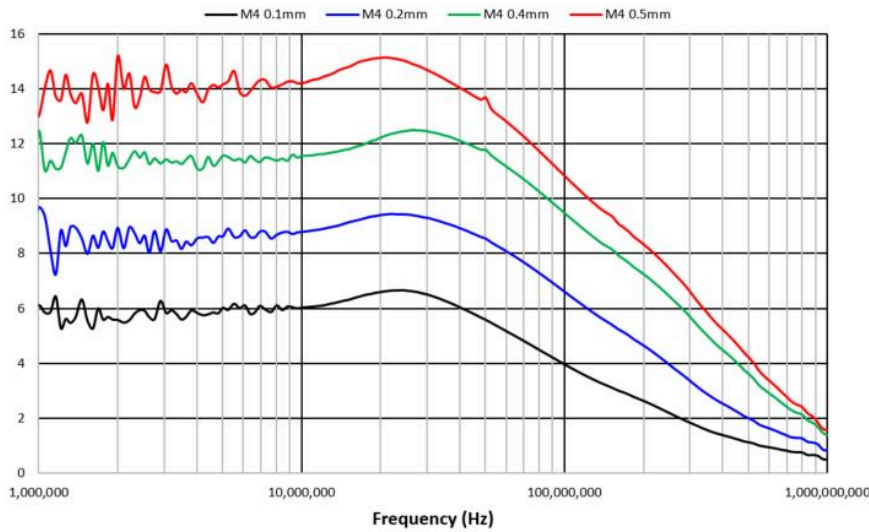

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com